

33X Starlight IR Network PTZ Dome Camera

IPC6322LR(SR)3DU(PC)



Key Features

Optics

- 33X Optical Zoom
- Starlight illumination
- Fifth generation infrared technology more than 50m(492ft) IR distance
- IR antireflection window to increase the infrared transmittance
- Optical glass window with higher light transmittance
- Smart IR
- EIS (Electronic Image Stabilization)

Compression

- Ultra 265H.265H.264 MJPEG
- Embedded smart algorithm
- Triple streams
- Customized OSD

Network

- ONVIF Conformance

Structure

- Intelligent temperature control technology


- More effective heat dissipation system
- 6KV surge protection designed for network interface
- IP66

Specifications

	IPC6322LR33DURC		IPC6322SR33DURC		
Camera					
Sensor	1/2.8"2.0 megapixel progressive scan, CMOS				
Lens	4.5- 148.5mm AF automatic focusing and motorized zoom lens				
Digital Zoom	16				
Optical Zoom	33				
DORI Distance	Lens(mm)	Detect(m)	Observe(m)	Recognize(m)	Identify(m)
Angle of View (W)	4.5	69.8	27.9	14.0	7.0
Angle of View (O)	148.5	2304.3	921.7	460.9	230.4
Angle of View (H)	76.8°- 2.1°				
Angle of View (V)	38.4°- 1.2°				
Angle of View (O)	94.46°- 2.48°				
Shutter	Auto/Manual, shutter time:1/1000S				
Minimum Illumination	Colour 0.00Lux (F1.5AGC ON) 0Lux with IR				
Iris	F1.5~F4.0				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>55 dB				
IR Range	UP to 150m (492ft)				
Defog	Digital Defog				
WDR	120dB				
Video					
Video Compression	Ultra 265H.265H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream: 2MP (1920x1080) Max 30fps; Sub Stream: 2MP (1920x1080) Max 30fps; Third Stream: D1 (720x576) Max 30fps				
HLC	Supported				
BLC	Supported				
EIS	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 24 areas				
ROI	Up to 8 areas				
Motion Detection	Up to 4 areas				
Smart					
Behavior Detection	Intrusion, cross line, motion detection				

Intrusion	Enter and loiter in a predefined/virtual region
cross line	Cross a predefined/virtual line
motion detection	Moving within a predefined/virtual region
Recognition	Face detection/Audio detection
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Audio	
Audio Compression	G.711
Two-way Audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SNMP, SSQoS
Compatible Integration	ONVIF(Profile S, Profile G, Profile T), API
Pan & Tilt	
Pan Range	360°
Pan Speed	0.1°/s ~ 300°/s
	Preset speed: 200°/s
Tilt Range	-15° ~ 90° (auto reverse)
Tilt Speed	0.1° ~ 80°/s
	Preset speed: 80°/s
Number of Presets	1024
Patrol	Preset patrol, route patrol, recorded patrol
Home Position	Supported
Interface	
Audio I/O	1 Input @ 1.2V [pp]
	1 Output @ 1.2V [pp]
Alarm I/O	2/1
Network	1 RJ45 10M/100M Base Ethernet
General	
Power	DC 12V±25%
	DC 12V±25%, PoE (PSE Required)
	Power consumption: ~1.5W
Dimensions (ØH)	100mm × 344mm
Weight	3kg(6.6lb)
Working Environment	-40°C ~ 65°C(10°F ~ 149°F) Humidity: 95% RH(noncondensing)
Ingress Protection	IP66
Reset Button	Supported

Dimensions

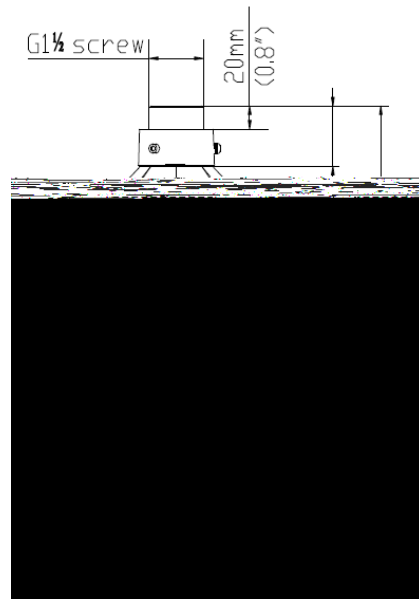

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email overseasbusiness@uniview.com globalsupport@uniview.com

<http://www.uniview.com>

© 2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.